

APPENDIX H NOISE

Noise is generally described as unwanted sound. Unwanted sound can be based on objective effects (such as hearing loss or damage to structures) or subjective judgments (community annoyance). Noise analysis thus requires a combination of physical measurement of sound, physical and physiological effects, plus psycho- and socio-acoustic effects.

Section 1.0 of this appendix describes how sound is measured and summarizes noise impacts in terms of community acceptability and land use compatibility. Section 2.0 gives detailed descriptions of the effects of noise that lead to the impact guidelines presented in Section 1.0. Section 3.0 provides a description of the specific methods used to predict aircraft noise, including a detailed description of sonic booms.

1.0 NOISE DESCRIPTORS AND IMPACT

Aircraft operating in military airspace generate two types of sound. One is “subsonic” noise, which is continuous sound generated by the aircraft’s engines and also by air flowing over the aircraft itself. The other is sonic booms (where authorized for supersonic), which are transient impulsive sounds generated during supersonic flight. These are quantified in different ways.

Section 1.1 describes the characteristics which are used to describe sound. Section 1.2 describes the specific noise metrics used for noise impact analysis. Section 1.3 describes how environmental impact and land use compatibility are judged in terms of these quantities.

1.1 Quantifying Sound

Measurement and perception of sound involve two basic physical characteristics: amplitude and frequency. Amplitude is a measure of the strength of the sound and is directly measured in terms of the pressure of a sound wave. Because sound pressure varies in time, various types of pressure averages are usually used. Frequency, commonly perceived as pitch, is the number of times per second the sound causes air molecules to oscillate. Frequency is measured in units of cycles per second, or hertz (Hz).

Amplitude. The loudest sounds the human ear can comfortably hear have acoustic energy one trillion times the acoustic energy of sounds the ear can barely detect. Because of this vast range, attempts to represent sound amplitude by pressure are generally unwieldy. Sound is, therefore, usually represented on a logarithmic scale with a unit called the decibel (dB). Sound measured on the decibel scale is referred to as a sound level. The threshold of human hearing is approximately 0 dB, and the threshold of discomfort or pain is around 120 dB.

Because of the logarithmic nature of the decibel scale, sounds levels do not add and subtract directly and are somewhat cumbersome to handle mathematically. However, some simple rules of thumb are useful in dealing with sound levels. First, if a sound’s intensity is doubled, the sound level increases by 3 dB, regardless of the initial sound level. Thus, for example:

60 dB + 60 dB = 63 dB, and

80 dB + 80 dB = 83 dB.

The total sound level produced by two sounds of different levels is usually only slightly more than the higher of the two. For example:

$$60.0 \text{ dB} + 70.0 \text{ dB} = 70.4 \text{ dB}.$$

Because the addition of sound levels behaves differently than that of ordinary numbers, such addition is often referred to as “decibel addition” or “energy addition.” The latter term arises from the fact that the combination of decibel values consists of first converting each decibel value to its corresponding acoustic energy, then adding the energies using the normal rules of addition, and finally converting the total energy back to its decibel equivalent.

The difference in dB between two sounds represents the ratio of the amplitudes of those two sounds. Because human senses tend to be proportional (i.e., detect whether one sound is twice as big as another) rather than absolute (i.e., detect whether one sound is a given number of pressure units bigger than another), the decibel scale correlates well with human response.

Under laboratory conditions, differences in sound level of 1 dB can be detected by the human ear. In the community, the smallest change in average noise level that can be detected is about 3 dB. A change in sound level of about 10 dB is usually perceived by the average person as a doubling (or halving) of the sound’s loudness, and this relation holds true for loud sounds and for quieter sounds. A decrease in sound level of 10 dB actually represents a 90 percent decrease in sound *intensity* but only a 50 percent decrease in perceived *loudness* because of the nonlinear response of the human ear (similar to most human senses).

The one exception to the exclusive use of levels, rather than physical pressure units, to quantify sound is in the case of sonic booms. As described in Section 3.2, sonic booms are coherent waves with specific characteristics. There is a long-standing tradition of describing individual sonic booms by the amplitude of the shock waves, in pounds per square foot (psf). This is particularly relevant when assessing structural effects as opposed to loudness or cumulative community response. In this environmental analysis, sonic booms are quantified by either dB or psf, as appropriate for the particular impact being assessed.

Frequency. The normal human ear can hear frequencies from about 20 Hz to about 20,000 Hz. It is most sensitive to sounds in the 1,000 to 4,000 Hz range. When measuring community response to noise, it is common to adjust the frequency content of the measured sound to correspond to the frequency sensitivity of the human ear. This adjustment is called A-weighting (American National Standards Institute 1988). Sound levels that have been so adjusted are referred to as A-weighted sound levels.

The audible quality of high thrust engines in modern military combat aircraft can be somewhat different than other aircraft, including (at high throttle settings) the characteristic nonlinear crackle of high thrust engines. The spectral characteristics of various noises are accounted for by A-weighting, which approximates the response of the human ear but does not necessarily account for quality. There are other, more detailed, weighting factors that have been applied to sounds. In the 1950s and 1960s, when noise from civilian jet aircraft became an issue, substantial research was performed to determine what characteristics of jet noise were a problem. The metrics Perceived Noise Level and Effective Perceived Noise Level were developed. These accounted for nonlinear behavior of hearing and the importance of low frequencies at high levels, and for many years airport/airbase noise contours were presented in terms of Noise Exposure Forecast, which was based on Perceived Noise Level and Effective

Perceived Noise Level. In the 1970s, however, it was realized that the primary intrusive aspect of aircraft noise was the high noise level, a factor which is well represented by A-weighted levels and day-night average sound level (DNL). The refinement of Perceived Noise Level, Effective Perceived Noise Level, and Noise Exposure Forecast was not significant in protecting the public from noise.


There has been continuing research on noise metrics and the importance of sound quality, sponsored by the Department of Defense (DoD) for military aircraft noise and by the Federal Aviation Administration (FAA) for civil aircraft noise. The metric L_{dnmr} , which is described later and accounts for the increased annoyance of rapid onset rate of sound, is a product of this long-term research.

The amplitude of A-weighted sound levels is measured in dB. It is common for some noise analysts to denote the unit of A-weighted sounds by dBA. As long as the use of A-weighting is understood, there is no difference between dB and dBA: it is only important that the use of A-weighting be made clear. In this environmental analysis, A-weighted sound levels are reported as dB.

A-weighting is appropriate for continuous sounds, which are perceived by the ear. Impulsive sounds, such as sonic booms, are perceived by more than just the ear. When experienced indoors, there can be secondary noise from rattling of the building. Vibrations may also be felt. C-weighting (American National Standards Institute 1988) is applied to such sounds. This is a frequency weighting that is relatively flat over the range of human hearing (about 20 Hz to 20,000 Hz) that rolls off above 5,000 Hz and below 50 Hz. In this study, C-weighted sound levels are used for the assessment of sonic booms and other impulsive sounds. As with A-weighting, the unit is dB, but dBC is sometimes used for clarity. In this study, sound levels are reported in both A-weighting and C-weighting dBs, and C-weighted metrics are denoted when used.

Time Averaging. Sound pressure of a continuous sound varies greatly with time, so it is customary to deal with sound levels that represent averages over time. Levels presented as instantaneous (i.e., as might be read from the display of a sound level meter) are based on averages of sound energy over either 1/8 second (fast) or 1 second (slow). The formal definitions of fast and slow levels are somewhat complex, with details that are important to the makers and users of instrumentation. They may, however, be thought of as levels corresponding to the root-mean-square sound pressure measured over the 1/8-second or 1-second periods.

The most common uses of the fast or slow sound level in environmental analysis is in the discussion of the maximum sound level that occurs from the action, and in discussions of typical sound levels. Figure H-1 is a chart of A-weighted sound levels from typical sounds. Some (air conditioner, vacuum cleaner) are continuous sounds whose levels are constant for some time. Some (automobile, heavy truck) are the maximum sound during a vehicle passby. Some (urban daytime, urban nighttime) are averages over some extended period. A variety of noise metrics have been developed to describe noise over different time periods. These are described in Section 1.2.

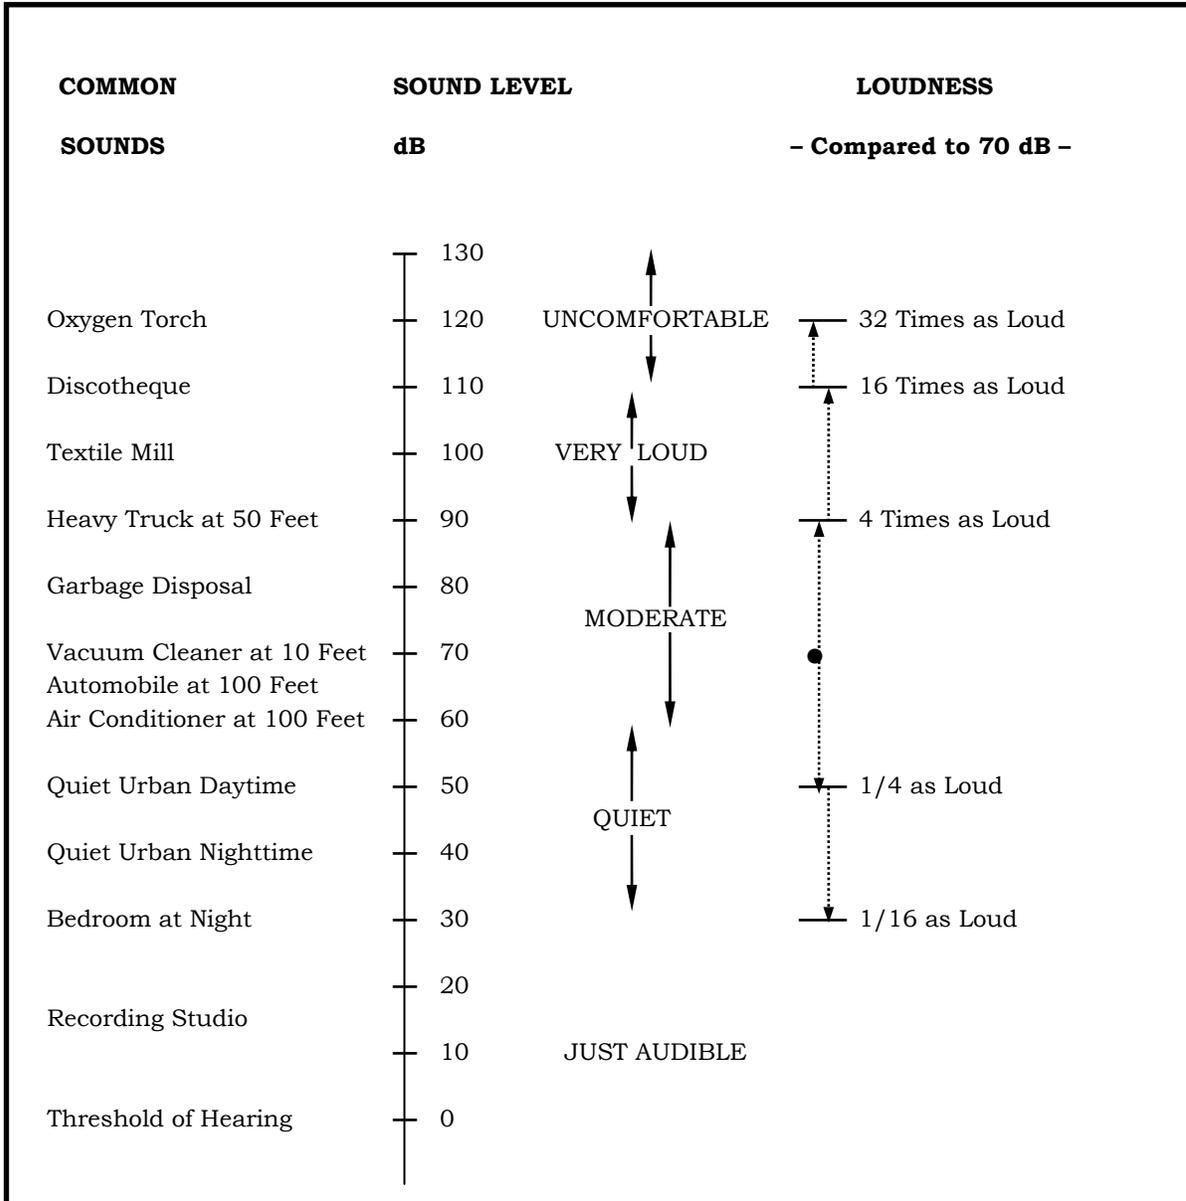

Source: *Handbook of Noise Control*, C.M. Harris, Editor, McGraw-Hill Book Co., 1979, and FICON 1992.

Figure H-1. Typical A-Weighted Sound Levels of Common Sounds

1.2 Noise Metrics

Maximum Sound Level

The highest A-weighted sound level measured during a single event in which the sound level changes value as time goes on (e.g., an aircraft overflight) is called the maximum A-weighted sound level or maximum sound level, for short. It is usually abbreviated by ALM, L_{max} , or L_{Amax} . The maximum sound level is important in judging the interference caused by a noise event with conversation, TV or radio listening, sleeping, or other common activities. Table H-1 reflects L_{max} values for typical aircraft associated with this assessment operating at the indicated flight profiles and power settings.

Table H-1. Representative Maximum Sound Levels (L_{max})

Aircraft (engine type)	Power Setting	Power Unit	L_{MAX} VALUES (IN DBA) AT VARYING DISTANCES (IN FEET)				
			500	1,000	2,000	5,000	10,000
Takeoff/Departure Operations (at 300 knots airspeed)							
A-10A	6200	NF	99.9	91.7	82.2	68.2	57.8
B-1	97.5%	RPM	126.5	118.3	109.9	98.3	88.7
F-15 (P220)	90%	NC	111.4	104.3	96.6	85	74.7
F-16 (P229)	93%	NC	113.7	106.2	98.1	86.1	75.7
F-22	100%	ETR	119.7	112.4	104.6	93	82.9
Landing/Arrival Operations (at 160 knots airspeed)							
A-10A	5225	NF	97	88.9	78.8	60.2	46.4
B-1	90%	RPM	98.8	91.9	84.5	72.8	62
F-15 (P220)	75%	NC	88.5	81.6	74.3	63.2	53.4
F-16 (P229)	83.5%	NC	92.6	85.5	77.8	66.1	55.6
F-22	43%	ETR	111.3	103.9	95.9	83.9	73.1

Engine Unit of Power: RPM—Revolutions Per Minute; ETR—Engine Thrust Ratio; NC—Engine Core RPM; and NF—Engine Fan RPM.

Source: SELCalc2 (Flyover Noise Calculator), Using Noisemap 6/7 and Maximum Omega10 Result as the defaults.

Peak Sound Level

For impulsive sounds, the true instantaneous sound pressure is of interest. For sonic booms, this is the peak pressure of the shock wave, as described in Section 3.2 of this appendix. This pressure is usually presented in physical units of pounds per square foot. Sometimes it is represented on the decibel scale, with symbol Lpk. Peak sound levels do not use either A or C weighting.

Sound Exposure Level

Individual time-varying noise events have two main characteristics: a sound level that changes throughout the event and a period of time during which the event is heard. Although the maximum sound level, described above, provides some measure of the intrusiveness of the event, it alone does not completely describe the total event. The period of time during which the sound is heard is also significant. The Sound Exposure Level (abbreviated SEL or L_{AE} for A-weighted sounds) combines both of these characteristics into a single metric.

SEL is a composite metric that represents both the intensity of a sound and its duration. Mathematically, the mean square sound pressure is computed over the duration of the event, then multiplied by the duration in seconds, and the resultant product is turned into a sound level. It does not directly represent the sound level heard at any given time, but rather provides a measure of the net impact of the entire acoustic event. It has been well established in the scientific community that SEL measures this impact much more reliably than just the maximum sound level. Table H-2 shows SEL values corresponding to the aircraft and power settings reflected in Table H-1.

Table H-2. Representative Sound Exposure Levels (SEL)

Aircraft (engine type)	Power Setting	Power Unit	SEL VALUES (IN DBA) AT VARYING DISTANCES (IN FEET)				
			500	1,000	2,000	5,000	10,000
Takeoff/Departure Operations (at 300 knots airspeed)							
A-10A	6200	NF	102.6	96.2	88.5	76.9	68.3
B-1	97.5%	RPM	129.5	123.1	116.5	107.3	99.3
F-15 (P220)	90%	NC	117.3	112	106.1	97	88.4
F-16 (P229)	93%	NC	116.5	110.8	104.6	95	86.3
F-22	100%	ETR	124.2	118.7	112.7	103.5	95.2
Landing/Arrival Operations (at 160 knots airspeed)							
A-10A	5225	NF	97.9	91.5	83.3	67	55
B-1	90%	RPM	103.4	98.3	92.7	83.4	74.4
F-15 (P220)	75%	NC	94.2	89.2	83.6	74.9	66.9
F-16 (P229)	83.5%	NC	97.4	92.1	86.3	76.9	68.2
F-22	43%	ETR	114.9	109.3	103.1	93.5	84.5

Engine Unit of Power: RPM—Revolutions Per Minute; ETR—Engine Thrust Ratio; NC—Engine Core RPM; and NF—Engine Fan RPM.

Source: SELCalc2 (Flyover Noise Calculator), Using Noisemap 6/7 and Maximum Omega10 Result as the defaults.

Because the SEL and the maximum sound level are both used to describe single events, there is sometimes confusion between the two, so the specific metric used should be clearly stated.

SEL can be computed for C-weighted levels (appropriate for impulsive sounds), and the results denoted CSEL or L_{CE} . SEL for A-weighted sound is sometimes denoted ASEL. Within this study, SEL is used for A-weighted sounds and CSEL for C-weighted.

Equivalent Sound Level

For longer periods of time, total sound is represented by the equivalent continuous sound pressure level (L_{eq}). L_{eq} is the average sound level over some time period (often an hour or a day, but any explicit time span can be specified), with the averaging being done on the same energy basis as used for SEL. SEL and L_{eq} are closely related, with L_{eq} being SEL over some time period normalized by that time.

Just as SEL has proven to be a good measure of the noise impact of a single event, L_{eq} has been established to be a good measure of the impact of a series of events during a given time period. Also, while L_{eq} is defined as an average, it is effectively a sum over that time period and is, thus, a measure of the cumulative impact of noise.

Day-Night Average Sound Level

Noise tends to be more intrusive at night than during the day. This effect is accounted for by applying a 10 dB penalty to events that occur after 10 pm and before 7 am. If L_{eq} is computed over a 24-hour period with this nighttime penalty applied, the result is the DNL. DNL is the community noise metric recommended by the USEPA (United States Environmental Protection Agency [USEPA] 1974) and has been adopted by most federal agencies (Federal Interagency Committee on Noise 1992). It has been well established that DNL correlates well with long-term community response to noise (Schultz 1978; Finegold *et al.* 1994). This correlation is presented in Section 1.3 of this appendix.

DNL accounts for the total, or cumulative, noise impact at a given location, and for this reason is often referred to as a “cumulative” metric.

It was noted earlier that, for impulsive sounds, such as sonic booms, C-weighting is more appropriate than A-weighting. The day-night average sound level computed with C-weighting is denoted CDNL or L_{Cdn} . This procedure has been standardized, and impact interpretive criteria similar to those for DNL have been developed (Committee on Hearing, Bioacoustics and Biomechanics 1981).

Onset-Adjusted Monthly Day-Night Average Sound Level

Aircraft operations in military training airspace generate a noise environment somewhat different from other community noise environments. Overflights are sporadic, occurring at random times and varying from day to day and week to week. This situation differs from most community noise environments, in which noise tends to be continuous or patterned. Individual military overflight events also differ from typical community noise events in that noise from a low-altitude, high-air-speed flyover can have a rather sudden onset.

To represent these differences, the conventional DNL metric is adjusted to account for the “surprise” effect of the sudden onset of aircraft noise events on humans (Plotkin *et al.* 1987; Stusnick *et al.* 1992; Stusnick *et al.* 1993). For aircraft exhibiting a rate of increase in sound level (called onset rate) of from 15 to 150 dB per second, an adjustment or penalty ranging from 0 to 11 dB is added to the normal SEL. Onset rates above 150 dB per second require an 11 dB penalty, while onset rates below 15 dB per second require no adjustment. The DNL is then determined in the same manner as for conventional aircraft noise events and is designated as Onset-Rate Adjusted Day-Night Average Sound Level (abbreviated L_{dnmr}).


Because of the irregular occurrences of aircraft operations, the number of average daily operations is determined by using the calendar month with the highest number of operations. The monthly average is denoted L_{dnmr} . Noise levels are calculated the same way for both DNL and L_{dnmr} . L_{dnmr} is interpreted by the same criteria as used for DNL.

1.3 Noise Impact

Community Reaction

Studies of long-term community annoyance to numerous types of environmental noise show that DNL correlates well with the annoyance. Schultz (1978) showed a consistent relationship between DNL and annoyance. Schultz’s original curve fit (Figure H-2) shows that there is a remarkable consistency in results

of attitudinal surveys which relate the percentages of groups of people who express various degrees of annoyance when exposed to different DNL.

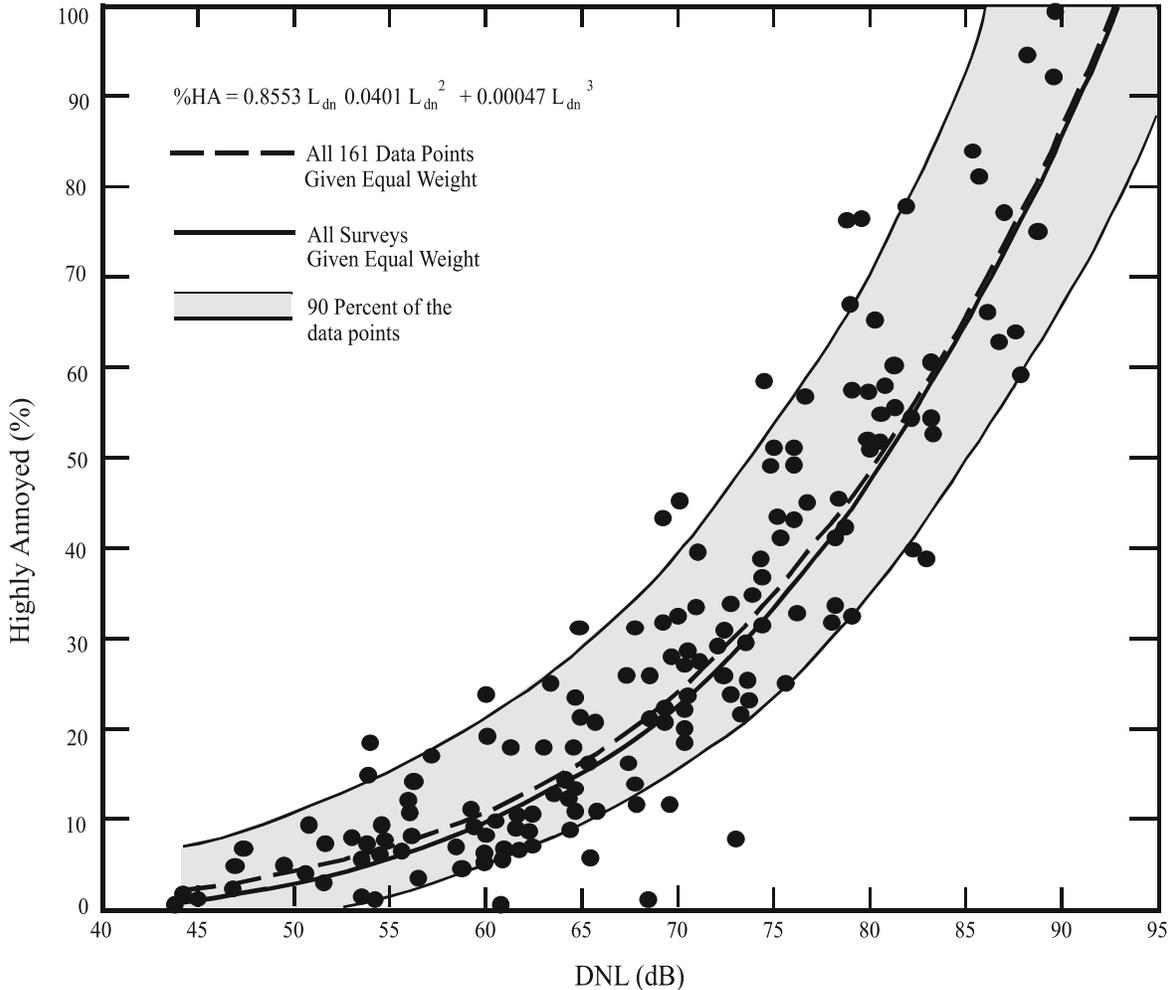

Source: Schultz 1978

Figure H-2. Community Surveys of Noise Annoyance

A more recent study has reaffirmed this relationship (Fidell *et al.* 1991). Figure H-3 (Federal Interagency Committee on Noise 1992) shows an updated form of the curve fit (Finegold *et al.* 1994) in comparison with the original. The updated fit, which does not differ substantially from the original, is the current preferred form. In general, correlation coefficients of 0.85 to 0.95 are found between the percentages of groups of people highly annoyed and the level of average noise exposure. The correlation coefficients for the annoyance of individuals are relatively low, however, on the order of 0.5 or less. This is not surprising, considering the varying personal factors that influence the manner in which individuals react to noise. Nevertheless, findings substantiate that community annoyance to aircraft noise is represented quite reliably using DNL.

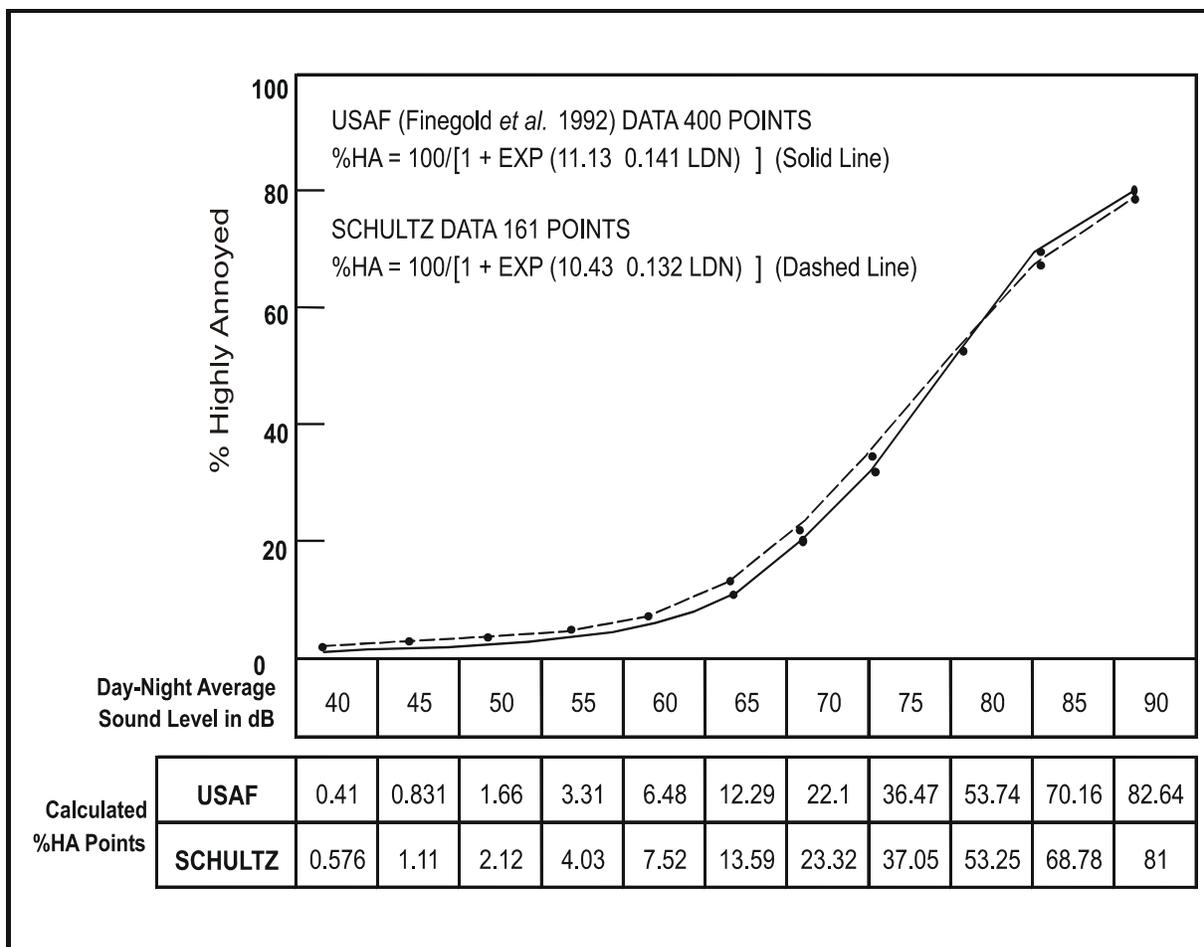


Figure H-3. Response of Communities to Noise; Comparison of Original (Schultz 1978) and Current (Finegold *et al.* 1994) Curve Fits

As noted earlier for SEL, DNL does not represent the sound level heard at any particular time, but rather represents the total sound exposure. DNL accounts for the sound level of individual noise events, the duration of those events, and the number of events. Its use is endorsed by the scientific community (American National Standards Institute 1980, 1988, 2005; USEPA 1974; Federal Interagency Committee on Urban Noise 1980; Federal Interagency Committee on Noise 1992).

While DNL is the best metric for quantitatively assessing cumulative noise impact, it does not lend itself to intuitive interpretation by non-experts. Accordingly, it is common for environmental noise analyses to include other metrics for illustrative purposes. A general indication of the noise environment can be presented by noting the maximum sound levels which can occur and the number of times per day noise events will be loud enough to be heard. Use of other metrics as supplements to DNL has been endorsed by federal agencies (Federal Interagency Committee on Noise 1992).

The Schultz curve is generally applied to annual average DNL. In Section 1.2, L_{dnmr} was described and presented as being appropriate for quantifying noise in military airspace. The Schultz curve is used with L_{dnmr} as the noise metric. L_{dnmr} is always equal to or greater than DNL, so impact is generally higher than would have been predicted if the onset rate and busiest-month adjustments were not accounted for.

There are several points of interest in the noise-annoyance relation. The first is DNL of 65 dB. This is a level most commonly used for noise planning purposes and represents a compromise between community impact and the need for activities like aviation which do cause noise. Areas exposed to DNL above 65 dB are generally not considered suitable for residential use. The second is DNL of 55 dB, which was identified by USEPA as a level "...requisite to protect the public health and welfare with an adequate margin of safety," (USEPA 1974) which is essentially a level below which adverse impact is not expected. The third is DNL of 75 dB. This is the lowest level at which adverse health effects could be credible (USEPA 1974). The very high annoyance levels correlated with DNL of 75 dB make such areas unsuitable for residential land use.

Sonic boom exposure is measured by C-weighting, with the corresponding cumulative metric being CDNL. Correlation between CDNL and annoyance has been established, based on community reaction to impulsive sounds (Committee on Hearing, Bioacoustics and Biomechanics 1981). Values of the C-weighted equivalent to the Schultz curve are different than that of the Schultz curve itself. Table H-3 shows the relation between annoyance, DNL, and CDNL.

Table H-3. Relation Between Annoyance, DNL and CDNL

<i>DNL</i>	<i>% Highly Annoyed</i>	<i>CDNL</i>
45	0.83	42
50	1.66	46
55	3.31	51
60	6.48	56
65	12.29	60
70	22.10	65

Interpretation of CDNL from impulsive noise is accomplished by using the CDNL versus annoyance values in Table H-3. CDNL can be interpreted in terms of an "equivalent annoyance" DNL. For example, CDNL of 52, 61, and 69 dB are equivalent to DNL of 55, 65, and 75 dB, respectively. If both continuous and impulsive noise occurs in the same area, impacts are assessed separately for each.

Land Use Compatibility

As noted above, the inherent variability between individuals makes it impossible to predict accurately how any individual will react to a given noise event. Nevertheless, when a community is considered as a whole, its overall reaction to noise can be represented with a high degree of confidence. As described above, the best noise exposure metric for this correlation is the DNL or L_{dnmr} for military overflights. Impulsive noise can be assessed by relating CDNL to an "equivalent annoyance" DNL, as outlined in Section 1.3.1.

In June 1980, an ad hoc Federal Interagency Committee on Urban Noise published guidelines (Federal Interagency Committee on Urban Noise 1980) relating DNL to compatible land uses. This committee was composed of representatives from DoD, Transportation, and Housing and Urban Development; USEPA; and the Veterans Administration. Since the issuance of these guidelines, federal agencies have generally adopted these guidelines for their noise analyses.

Following the lead of the committee, DoD and FAA adopted the concept of land-use compatibility as the accepted measure of aircraft noise effect. The FAA included the committee's guidelines in the Federal Aviation Regulations (United States Department of Transportation 1984). These guidelines are reprinted in Table H-4, along with the explanatory notes included in the regulation. Although these guidelines are not mandatory (note the footnote "*" in the table), they provide the best means for determining noise impact in airport communities. In general, residential land uses normally are not compatible with outdoor DNL values above 65 dB, and the extent of land areas and populations exposed to DNL of 65 dB and higher provides the best means for assessing the noise impacts of alternative aircraft actions. In some cases a change in noise level, rather than an absolute threshold, may be a more appropriate measure of impact.

Table H-4. Land-Use Compatibility With Yearly Day-Night Average Sound Levels

Land Use	YEARLY DAY-NIGHT AVERAGE SOUND LEVEL (DNL) IN DECIBELS					
	Below 65	65-70	70-75	75-80	80-85	Over 85
Residential						
Residential, other than mobile homes and transient lodgings	Y	N(1)	N(1)	N	N	N
Mobile home parks	Y	N	N	N	N	N
Transient lodgings	Y	N(1)	N(1)	N(1)	N	N
Public Use						
Schools	Y	N(1)	N(1)	N	N	N
Hospitals and nursing homes	Y	25	30	N	N	N
Churches, auditoria, and concert halls	Y	25	30	N	N	N
Government services	Y	Y	25	30	N	N
Transportation	Y	Y	Y(2)	Y(3)	Y(4)	Y(4)
Parking	Y	Y	Y(2)	Y(3)	Y(4)	N
Commercial Use						
Offices, business and professional	Y	Y	25	30	N	N
Wholesale and retail—building materials, hardware, and farm equipment	Y	Y	Y(2)	Y(3)	Y(4)	N
Retail trade—general	Y	Y	25	30	N	N
Utilities	Y	Y	Y(2)	Y(3)	Y(4)	N
Communication	Y	Y	25	30	N	N
Manufacturing and Production						
Manufacturing, general	Y	Y	Y(2)	Y(3)	Y(4)	N
Photographic and optical	Y	Y	25	30	N	N
Agriculture (except livestock) and forestry	Y	Y(6)	Y(7)	Y(8)	Y(8)	Y(8)
Livestock farming and breeding	Y	Y(6)	Y(7)	N	N	N
Mining and fishing, resource production and extraction	Y	Y	Y	Y	Y	Y
Recreational						
Outdoor sports arenas and spectator sports	Y	Y(5)	Y(5)	N	N	N
Outdoor music shells, amphitheatres	Y	N	N	N	N	N
Nature exhibits and zoos	Y	Y	N	N	N	N
Amusements, parks, resorts, and camps	Y	Y	Y	N	N	N
Golf courses, riding stables, and water recreation	Y	Y	25	30	N	N

Numbers in parentheses refer to notes.

* The designations contained in this table do not constitute a federal determination that any use of land covered by the program is acceptable or unacceptable under federal, state, or local law. The responsibility for determining the acceptable and permissible land uses and the relationship between specific properties and specific noise contours rests with the local authorities. FAA determinations under Part 150 are not intended to substitute federally determined land uses for those determined to be appropriate by local authorities in response to locally determined needs and values in achieving noise-compatible land uses.

KEY TO TABLE H-4

Y (YES) = Land Use and related structures compatible without restrictions.

N (No) = Land Use and related structures are not compatible and should be prohibited.

NLR = Noise Level Reduction (outdoor to indoor) to be achieved through incorporation of noise attenuation into the design and construction of the structure.

25, 30, or 35 = Land Use and related structures generally compatible; measures to achieve NLR of 25, 30, or 35 dB must be incorporated into design and construction of structures.

NOTES FOR TABLE H-4

- (1) Where the community determines that residential or school uses must be allowed, measures to achieve outdoor-to-indoor NLR of at least 25 dB and 30 dB should be incorporated into building codes and be considered in individual approvals. Normal residential construction can be expected to provide an NLR of 20 dB; thus the reduction requirements are often stated as 5, 10, or 15 dB over standard construction and normally assume mechanical ventilation and closed windows year-round. However, the use of NLR criteria will not eliminate outdoor noise problems.
- (2) Measures to achieve NLR 25 dB must be incorporated into the design and construction of portions of these buildings where the public is received, office areas, noise-sensitive areas, or where the normal noise level is low.
- (3) Measures to achieve NLR 30 dB must be incorporated into the design and construction of portions of these buildings where the public is received, office areas, noise-sensitive areas, or where the normal noise level is low.
- (4) Measures to achieve NLR 35 dB must be incorporated into the design and construction of portions of these buildings where the public is received, office areas, noise-sensitive areas, or where the normal noise level is low.
- (5) Land-use compatible provided special sound reinforcement systems are installed.
- (6) Residential buildings require an NLR of 25.
- (7) Residential buildings require an NLR of 30.
- (8) Residential buildings not permitted.

2.0 NOISE EFFECTS

The discussion in Section 1.3 presents the global effect of noise on communities. The following sections describe particular noise effects.

2.1 Hearing Loss

Noise-induced hearing loss is probably the best defined of the potential effects of human exposure to excessive noise. Federal workplace standards for protection from hearing loss allow a time-average level of 90 dB over an 8-hour work period, or 85 dB averaged over a 16-hour period. Even the most protective criterion (no measurable hearing loss for the most sensitive portion of the population at the ear's most sensitive frequency, 4,000 Hz, after a 40-year exposure suggests a time-average sound level of 70 dB over a 24-hour period (USEPA 1974). Since it is unlikely that airport neighbors will remain outside their homes 24 hours per day for extended periods of time, there is little possibility of hearing loss below a DNL of 75 dB, and this level is extremely conservative.

2.2 Nonauditory Health Effects

Nonauditory health effects of long-term noise exposure, where noise may act as a risk factor, have not been found to occur at levels below those protective against noise-induced hearing loss, described above. Most studies attempting to clarify such health effects have found that noise exposure levels established for hearing protection will also protect against any potential nonauditory health effects, at least in workplace conditions. The best scientific summary of these findings is contained in the lead paper at the National Institutes of Health Conference on Noise and Hearing Loss, held on January 22–24, 1990, in Washington, D.C., which states “The nonauditory effects of chronic noise exposure, when noise is suspected to act as one of the risk factors in the development of hypertension, cardiovascular disease, and other nervous disorders, have never been proven to occur as chronic manifestations at levels below these criteria (an average of 75 dBA for complete protection against hearing loss for an eight-hour day)” (von Gierke 1990; parenthetical wording added for clarification). At the International Congress (1988) on Noise as a Public Health Problem, most studies attempting to clarify such health effects did not find them at levels below the criteria protective of noise-induced hearing loss; and even above these criteria, results regarding such health effects were ambiguous.

Consequently, it can be concluded that establishing and enforcing exposure levels protecting against noise-induced hearing loss would not only solve the noise-induced hearing loss problem but also any potential nonauditory health effects in the work place.

Although these findings were directed specifically at noise effects in the work place, they are equally applicable to aircraft noise effects in the community environment. Research studies regarding the nonauditory health effects of aircraft noise are ambiguous, at best, and often contradictory. Yet, even those studies which purport to find such health effects use time-average noise levels of 75 dB and higher for their research.

For example, in an often-quoted paper, two University of California at Los Angeles researchers found a relation between aircraft noise levels under the approach path to Los Angeles International Airport and increased mortality rates among the exposed residents by using an average noise exposure level greater than 75 dB for the “noise-exposed” population (Meecham and Shaw 1979). Nevertheless, three other

University of California at Los Angeles professors analyzed those same data and found no relation between noise exposure and mortality rates (Frerichs *et al.* 1980).

As a second example, two other University of California at Los Angeles researchers used this same population near Los Angeles International Airport to show a higher rate of birth defects during the period of 1970 to 1972 when compared with a control group residing away from the airport (Jones and Tauscher 1978). Based on this report, a separate group at the United States Centers for Disease Control performed a more thorough study of populations near Atlanta's Hartsfield International Airport for 1970 to 1972 and found no relation in their study of 17 identified categories of birth defects to aircraft noise levels above 65 dB (Edmonds 1979).

A recent review of health effects, prepared by a Committee of the Health Council of The Netherlands (Committee of the Health Council of the Netherlands 1996), analyzed currently available published information on this topic. The committee concluded that the threshold for possible long-term health effects was a 16-hour (6:00 a.m. to 10:00 p.m.) L_{eq} of 70 dB. Projecting this to 24 hours and applying the 10 dB nighttime penalty used with DNL, this corresponds to DNL of about 75 dB. The study also affirmed the risk threshold for hearing loss, as discussed earlier.

In summary, there is no scientific basis for a claim that potential health effects exist for aircraft time-average sound levels below 75 dB.

2.3 Annoyance

The primary effect of aircraft noise on exposed communities is one of annoyance. Noise annoyance is defined by the USEPA as any negative subjective reaction on the part of an individual or group (USEPA 1974). As noted in the discussion of DNL above, community annoyance is best measured by that metric.

Because the USEPA Levels Document (USEPA 1974) identified DNL of 55 dB as “. . . requisite to protect public health and welfare with an adequate margin of safety,” it is commonly assumed that 55 dB should be adopted as a criterion for community noise analysis. From a noise exposure perspective, that would be an ideal selection. However, financial and technical resources are generally not available to achieve that goal. Most agencies have identified DNL of 65 dB as a criterion which protects those most impacted by noise, and which can often be achieved on a practical basis (Federal Interagency Committee on Noise 1992). This corresponds to about 12 percent of the exposed population being highly annoyed.

Although DNL of 65 dB is widely used as a benchmark for significant noise impact, and is often an acceptable compromise, it is not a statutory limit, and it is appropriate to consider other thresholds in particular cases.

In this analysis, no specific threshold is used. The noise in the affected environment is evaluated on the basis of the information presented in this appendix and in the body of the environmental analysis.

Community annoyance from sonic booms is based on CDNL, as discussed in Section 1.3. These effects are implicitly included in the “equivalent annoyance” CDNL values in Table H-3, since those were developed from actual community noise impact.

2.4 Speech Interference

Speech interference associated with aircraft noise is a primary cause of annoyance to individuals on the ground. The disruption of routine activities in the home, such as radio or television listening, telephone use, or family conversation, gives rise to frustration and irritation. The quality of speech communication is also important in classrooms, offices, and industrial settings and can cause fatigue and vocal strain in those who attempt to communicate over the noise. Research has shown that the use of the SEL metric will measure speech interference successfully, and that a SEL exceeding 65 dB will begin to interfere with speech communication.

2.5 Sleep Interference

Sleep interference is another source of annoyance associated with aircraft noise. This is especially true because of the intermittent nature and content of aircraft noise, which is more disturbing than continuous noise of equal energy and neutral meaning.

Sleep interference may be measured in either of two ways. "Arousal" represents actual awakening from sleep, while a change in "sleep stage" represents a shift from one of four sleep stages to another stage of lighter sleep without actual awakening. In general, arousal requires a somewhat higher noise level than does a change in sleep stage.

An analysis sponsored by the Air Force summarized 21 published studies concerning the effects of noise on sleep (Pearsons *et al.* 1989). The analysis concluded that a lack of reliable in-home studies, combined with large differences among the results from the various laboratory studies, did not permit development of an acceptably accurate assessment procedure. The noise events used in the laboratory studies and in contrived in-home studies were presented at much higher rates of occurrence than would normally be experienced. None of the laboratory studies were of sufficiently long duration to determine any effects of habituation, such as that which would occur under normal community conditions. A recent extensive study of sleep interference in people's own homes (Ollerhead 1992) showed very little disturbance from aircraft noise.

There is some controversy associated with the recent studies, so a conservative approach should be taken in judging sleep interference. Based on older data, the USEPA identified an indoor DNL of 45 dB as necessary to protect against sleep interference (USEPA 1974). Assuming a very conservative structural noise insulation of 20 dB for typical dwelling units, this corresponds to an outdoor DNL of 65 dB as minimizing sleep interference.

A 1984 publication reviewed the probability of arousal or behavioral awakening in terms of SEL (Kryter 1984). Figure H-4, extracted from Figure 10.37 of Kryter (1984), indicates that an indoor SEL of 65 dB or lower should awaken less than 5 percent of those exposed. These results do not include any habituation over time by sleeping subjects. Nevertheless, this provides a reasonable guideline for assessing sleep interference and corresponds to similar guidance for speech interference, as noted above.

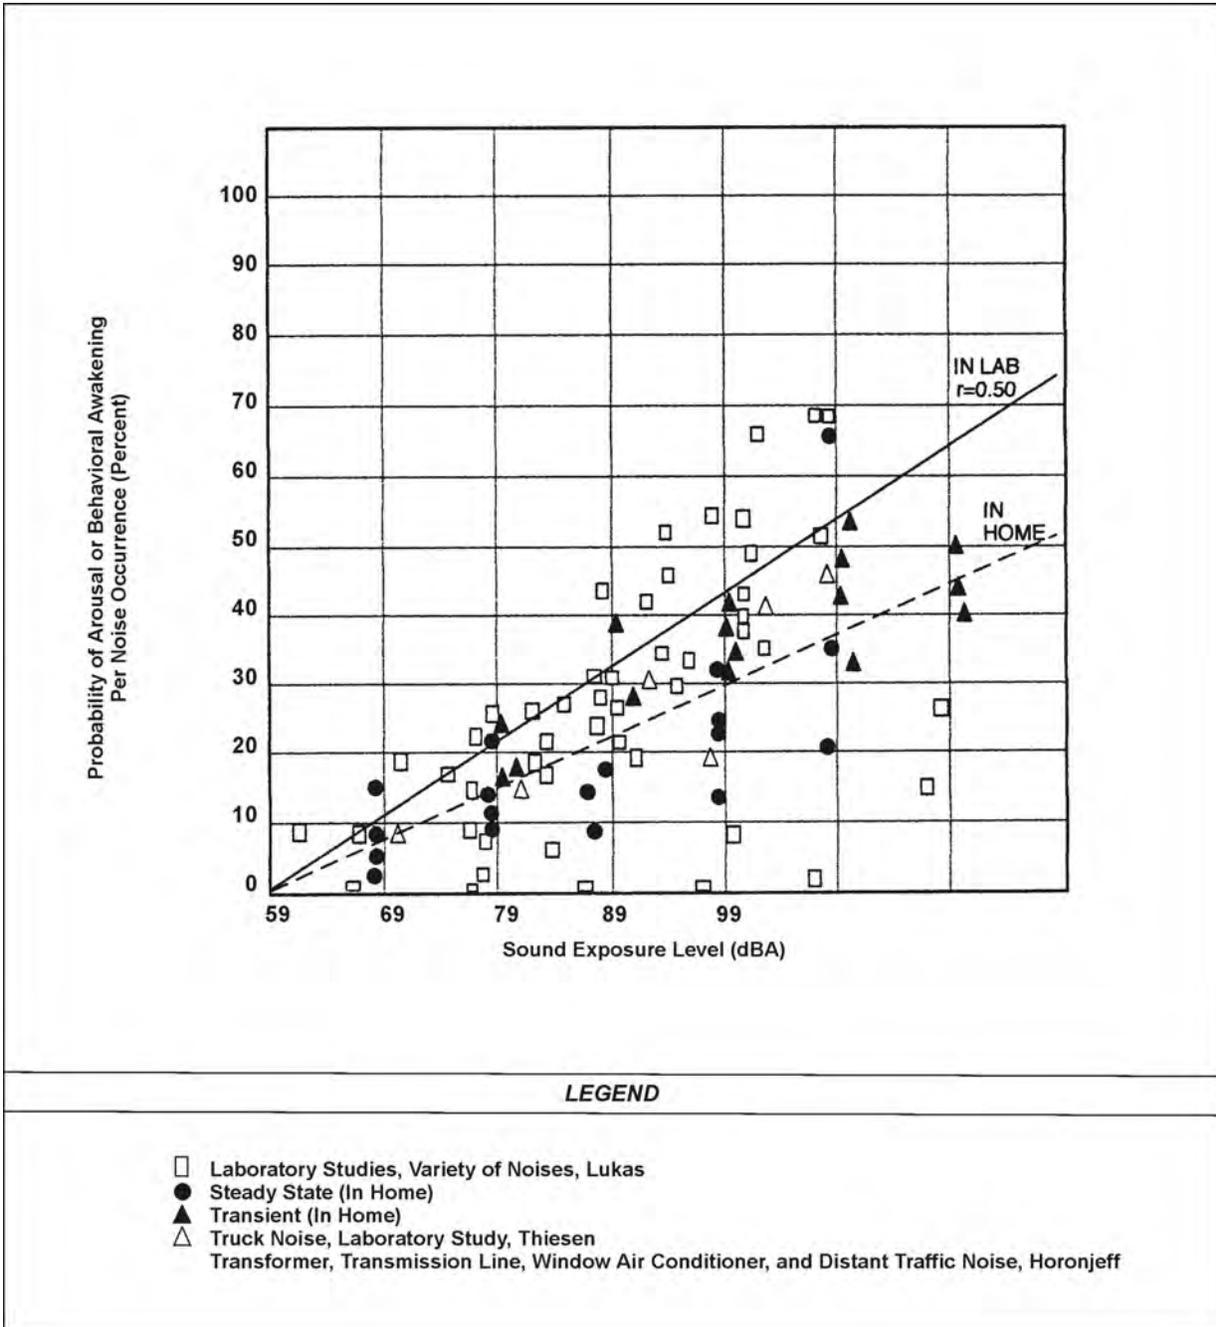


Figure H-4 Probability of Arousal or Behavioral Awakening in Terms of Sound Exposure Level

2.6 Noise Effects on Domestic Animals and Wildlife

Animal species differ greatly in their responses to noise. Each species has adapted, physically and behaviorally, to fill its ecological role in nature, and its hearing ability usually reflects that role. Animals rely on their hearing to avoid predators, obtain food, and communicate with and attract other members of their species. Aircraft noise may mask or interfere with these functions. Secondary effects may

include nonauditory effects similar to those exhibited by humans: stress, hypertension, and other nervous disorders. Tertiary effects may include interference with mating and resultant population declines.

2.7 Noise Effects on Structures

Subsonic Aircraft Noise

Normally, the most sensitive components of a structure to airborne noise are the windows and, infrequently, the plastered walls and ceilings. An evaluation of the peak sound pressures impinging on the structure is normally sufficient to determine the possibility of damage. In general, at sound levels above 130 dB, there is the possibility of the excitation of structural component resonance. While certain frequencies (such as 30 Hz for window breakage) may be of more concern than other frequencies, conservatively, only sounds lasting more than one second above a sound level of 130 dB are potentially damaging to structural components (National Research Council/National Academy of Sciences 1977).

A study directed specifically at low-altitude, high-speed aircraft showed that there is little probability of structural damage from such operations (Sutherland 1989). One finding in that study is that sound levels at damaging frequencies (e.g., 30 Hz for window breakage or 15 to 25 Hz for whole-house response) are rarely above 130 dB.

Noise-induced structural vibration may also cause annoyance to dwelling occupants because of induced secondary vibrations, or “rattle,” of objects within the dwelling, such as hanging pictures, dishes, plaques, and bric-a-brac. Window panes may also vibrate noticeably when exposed to high levels of airborne noise, causing homeowners to fear breakage. In general, such noise-induced vibrations occur at sound levels above those considered normally incompatible with residential land use. Thus assessments of noise exposure levels for compatible land use should also be protective of noise-induced secondary vibrations.

Sonic Booms

Sonic booms are commonly associated with structural damage. Most damage claims are for brittle objects, such as glass and plaster. Table H-5 summarizes the threshold of damage that might be expected at various overpressures. There is a large degree of variability in damage experience, and much damage depends on the pre-existing condition of a structure. Breakage data for glass, for example, spans a range of two to three orders of magnitude at a given overpressure. At 1 psf, the probability of a window breaking ranges from one in a billion (Sutherland 1990) to one in a million (Hershey and Higgins 1976). These damage rates are associated with a combination of boom load and glass condition. At 10 psf, the probability of breakage is between one in a hundred and one in a thousand. Laboratory tests of glass (White 1972) have shown that properly installed window glass will not break at overpressures below 10 psf, even when subjected to repeated booms, but in the real world glass is not in pristine condition.

Table H-5. Possible Damage to Structures From Sonic Booms

<i>Sonic Boom Overpressure Nominal (psf)</i>	<i>Type of Damage</i>	<i>Item Affected</i>
0.5 - 2	Plaster	Fine cracks; extension of existing cracks; more in ceilings; over door frames; between some plaster boards.
	Glass	Rarely shattered; either partial or extension of existing.
	Roof	Slippage of existing loose tiles/slates; sometimes new cracking of old slates at nail hole.
	Damage to outside walls	Existing cracks in stucco extended.
	Bric-a-brac	Those carefully balanced or on edges can fall; fine glass, such as large goblets, can fall and break.
	Other	Dust falls in chimneys.
2 - 4	Glass, plaster, roofs, ceilings	Failures show that would have been difficult to forecast in terms of their existing localized condition. Nominally in good condition.
4 - 10	Glass	Regular failures within a population of well-installed glass; industrial as well as domestic greenhouses.
	Plaster	Partial ceiling collapse of good plaster; complete collapse of very new, incompletely cured, or very old plaster.
	Roofs	High probability rate of failure in nominally good state, slurry-wash; some chance of failures in tiles on modern roofs; light roofs (bungalow) or large area can move bodily.
	Walls (out)	Old, free standing, in fairly good condition can collapse.
	Walls (in)	Inside ("party") walls known to move at 10 psf.
	Greater than 10	Glass
	Plaster	Most plaster affected.
	Ceilings	Plaster boards displaced by nail popping.
	Roofs	Most slate/slurry roofs affected, some badly; large roofs having good tile can be affected; some roofs bodily displaced causing gale-end and will-plate cracks; domestic chimneys dislodged if not in good condition.
	Walls	Internal party walls can move even if carrying fittings such as hand basins or taps; secondary damage due to water leakage.
	Bric-a-brac	Some nominally secure items can fall; e.g., large pictures, especially if fixed to party walls.

Source: Haber and Nakaki 1989

Damage to plaster occurs at similar ranges to glass damage. Plaster has a compounding issue in that it will often crack due to shrinkage while curing, or from stresses as a structure settles, even in the absence of outside loads. Sonic boom damage to plaster often occurs when internal stresses are high from these factors.

Some degree of damage to glass and plaster should thus be expected whenever there are sonic booms, but usually at the low rates noted above. In general, structural damage from sonic booms should be expected only for overpressures above 10 psf.

2.8 Noise Effects on Terrain

Subsonic Aircraft Noise

Members of the public often believe that noise from low-flying aircraft can cause avalanches or landslides by disturbing fragile soil or snow structures in mountainous areas. There are no known instances of such effects, and it is considered improbable that such effects will result from routine, subsonic aircraft operations.

Sonic Booms

In contrast to subsonic noise, sonic booms are considered to be a potential trigger for snow avalanches. Avalanches are highly dependent on the physical status of the snow, and do occur spontaneously. They can be triggered by minor disturbances, and there are documented accounts of sonic booms triggering avalanches. Switzerland routinely restricts supersonic flight during avalanche season.

Landslides are not an issue for sonic booms. There was one anecdotal report of a minor landslide from a sonic boom generated by the Space Shuttle during landing, but there is no credible mechanism or consistent pattern of reports.

2.9 Noise Effects on Historical and Archaeological Sites

Because of the potential for increased fragility of structural components of historical buildings and other historical sites, aircraft noise may affect such sites more severely than newer, modern structures. Again, there are few scientific studies of such effects to provide guidance for their assessment.

One study involved the measurements of sound levels and structural vibration levels in a superbly restored plantation house, originally built in 1795, and now situated approximately 1,500 feet from the centerline at the departure end of Runway 19L at Washington Dulles International Airport. These measurements were made in connection with the proposed scheduled operation of the supersonic Concorde airplane at Dulles (Wesler 1977). There was special concern for the building's windows, since roughly half of the 324 panes were original. No instances of structural damage were found. Interestingly, despite the high levels of noise during Concorde takeoffs, the induced structural vibration levels were actually less than those induced by touring groups and vacuum cleaning within the building itself.

As noted above for the noise effects of noise-induced vibrations on normal structures, assessments of noise exposure levels for normally compatible land uses should also be protective of historic and archaeological sites.

3.0 NOISE MODELING

3.1 Subsonic Aircraft Noise

An aircraft in subsonic flight generally emits noise from two sources: the engines and flow noise around the airframe. Noise generation mechanisms are complex and, in practical models, the noise sources must be based on measured data. The Air Force has developed a series of computer models and aircraft

noise databases for this purpose. The models include NOISEMAP (Moulton 1992) for noise around airbases, and MR_NMAP (Lucas and Calamia 1996) for use in MOAs, ranges, and low-level training routes. These models use the NOISEFILE database developed by the Air Force. NOISEFILE data includes SEL and L_{Amax} as a function of speed and power setting for aircraft in straight flight.

Noise from an individual aircraft is a time-varying continuous sound. It is first audible as the aircraft approaches, increases to a maximum when the aircraft is near its closest point, then diminishes as it departs. The noise depends on the speed and power setting of the aircraft and its trajectory. The models noted above divide the trajectory into segments whose noise can be computed from the data in NOISEFILE. The contributions from these segments are summed.

MR_NMAP was used to compute noise levels in the airspace. The primary noise metric computed by MR_NMAP was L_{dnmr} averaged over each airspace. Supporting routines from NOISEMAP were used to calculate SEL and L_{Amax} for various flight altitudes and lateral offsets from a ground receiver position.

3.2 Sonic Booms

When an aircraft moves through the air, it pushes the air out of its way. At subsonic speeds, the displaced air forms a pressure wave that disperses rapidly. At supersonic speeds, the aircraft is moving too quickly for the wave to disperse, so it remains as a coherent wave. This wave is a sonic boom. When heard at the ground, a sonic boom consists of two shock waves (one associated with the forward part of the aircraft, the other with the rear part) of approximately equal strength and (for fighter aircraft) separated by 100 to 200 milliseconds. When plotted, this pair of shock waves and the expanding flow between them have the appearance of a capital letter "N," so a sonic boom pressure wave is usually called an "N-wave." An N-wave has a characteristic "bang-bang" sound that can be startling. Figure H-5 shows the generation and evolution of a sonic boom N-wave under the aircraft. Figure H-6 shows the sonic boom pattern for an aircraft in steady supersonic flight. The boom forms a cone that is said to sweep out a "carpet" under the flight track.

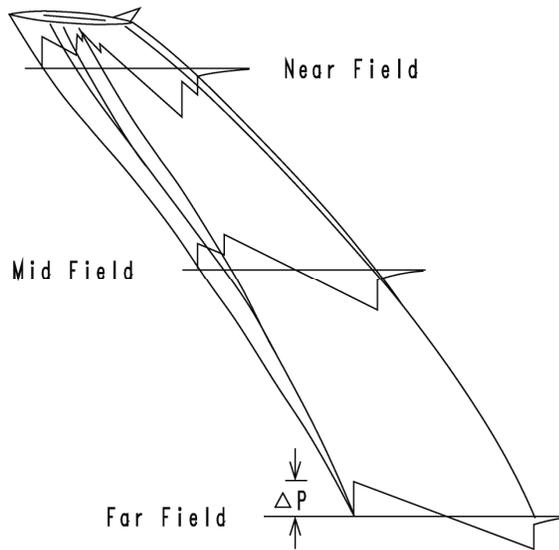


Figure H-5. Sonic Boom Generation and Evolution to N-Wave

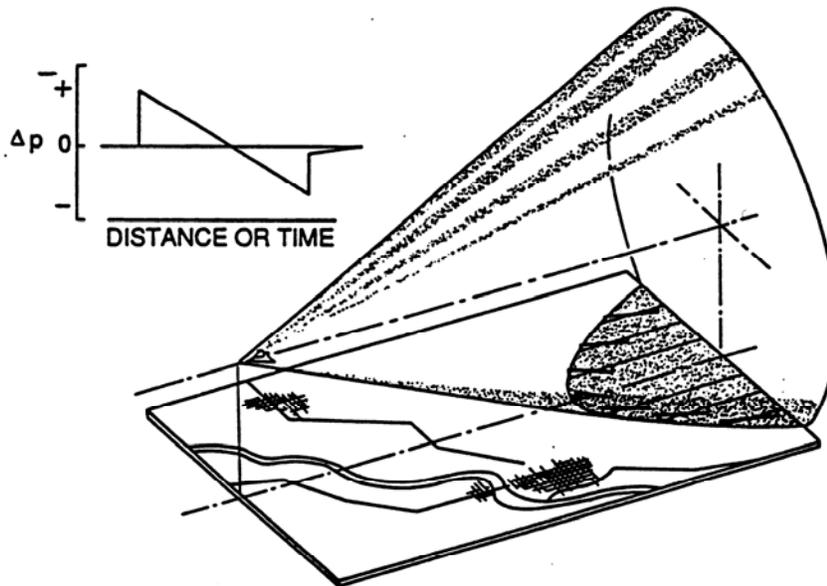


Figure H-6. Sonic Boom Carpet in Steady Flight

The complete ground pattern of a sonic boom depends on the size, shape, speed, and trajectory of the aircraft. Even for a nominally steady mission, the aircraft must accelerate to supersonic speed at the start, decelerate back to subsonic speed at the end, and usually change altitude. Figure H-7 illustrates the complexity of a nominal full mission.

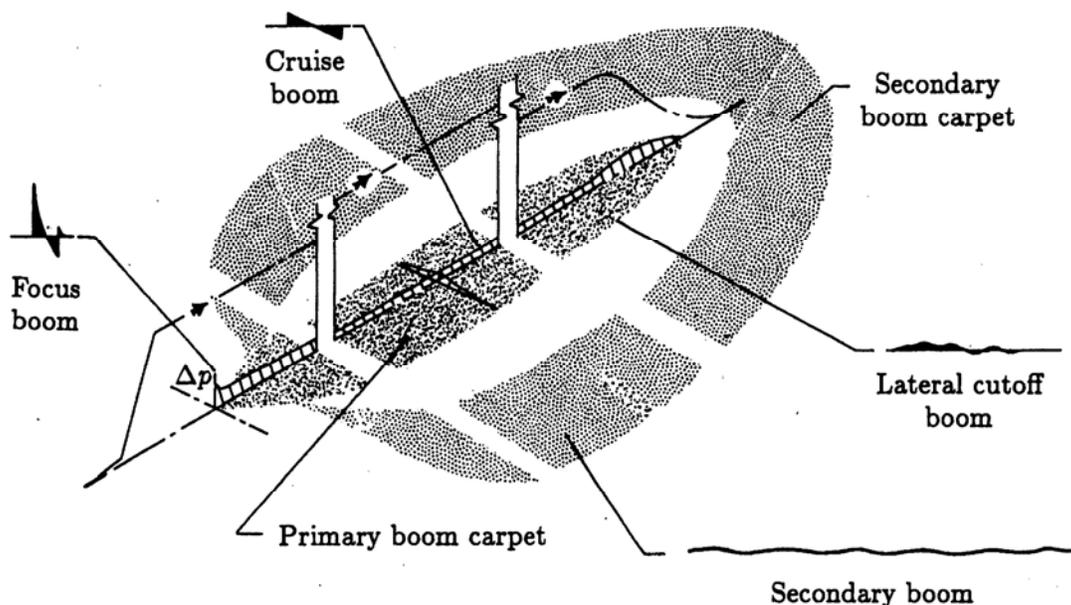


Figure H-7. Complex Sonic Boom Pattern for Full Mission

The Air Force's PCBoom4 computer program (Plotkin and Grandi 2002) can be used to compute the complete sonic boom footprint for a given single event, accounting for details of a particular maneuver.

Supersonic operations for the proposed action and alternatives are, however, associated with air combat training, which cannot be described in the deterministic manner that PCBoom4 requires. Supersonic events occur as aircraft approach an engagement, break at the end, and maneuver for advantage during the engagement. Long time cumulative sonic boom exposure, CDNL, is meaningful for this kind of environment.

Long-term sonic boom measurement projects have been conducted in four supersonic air combat training airspaces: White Sands, New Mexico (Plotkin *et al.* 1989); the eastern portion of the Goldwater Range, Arizona (Plotkin *et al.* 1992); the Elgin MOA at Nellis AFB, Nevada (Frampton *et al.* 1993); and the western portion of the Goldwater Range (Page *et al.* 1994). These studies included analysis of schedule and air combat maneuvering instrumentation data and supported development of the 1992 BOOMAP model (Plotkin *et al.* 1992). The current version of BOOMAP (Frampton *et al.* 1993; Plotkin 1996) incorporates results from all four studies. Because BOOMAP is directly based on long-term measurements, it implicitly accounts for such variables as maneuvers, statistical variations in operations, atmosphere effects, and other factors.

Figure H-8 shows a sample of supersonic flight tracks measured in the air combat training airspace at White Sands (Plotkin *et al.* 1989). The tracks fall into an elliptical pattern aligned with preferred

engagement directions in the airspace. Figure H-9 shows the CDNL contours that were fit to six months of measured booms in that airspace. The subsequent measurement programs refined the fit, and demonstrated that the elliptical maneuver area is related to the size and shape of the airspace (Frampton *et al.* 1993). BOOMAP quantifies the size and shape of CDNL contours, and also numbers of booms per day, in air combat training airspaces. That model was used for prediction of cumulative sonic boom exposure in this analysis.

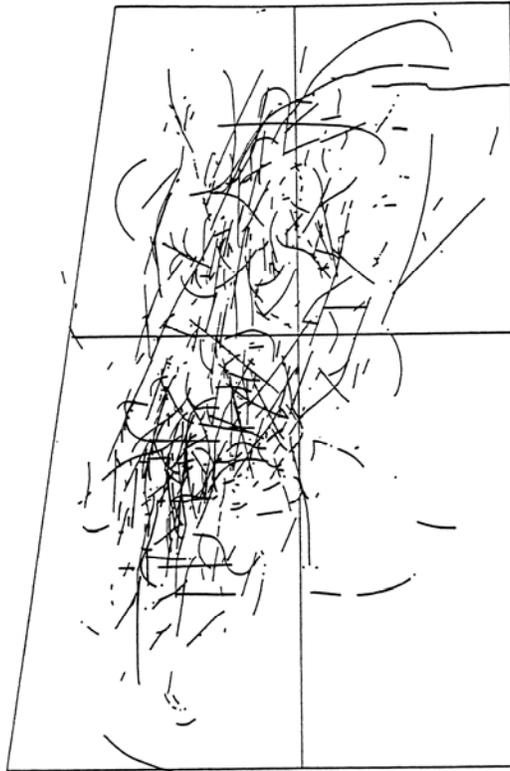


Figure H-8. Supersonic Flight Tracks in Supersonic Air Combat Training Airspace

August 2010

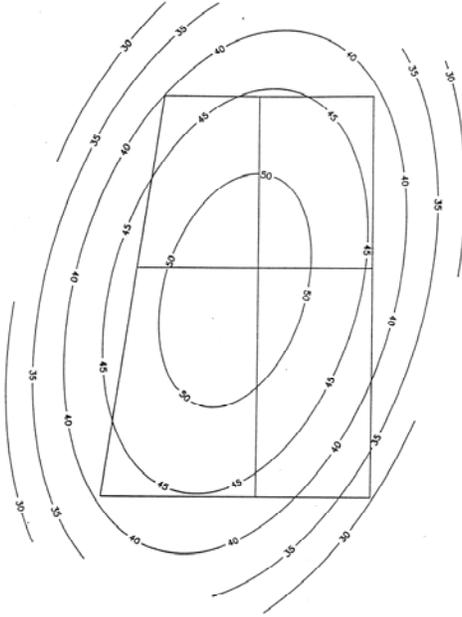


Figure H-9. Elliptical CDNL Contours in Supersonic Air Combat Training Airspace

REFERENCES

- American National Standards Institute (ANSI). 1980. Sound Level Descriptors for Determination of Compatible Land Use. American National Standards Institute Standard ANSI S3.231980.
- _____. 1988. Quantities and Procedures for Description and Measurement of Environmental Sound, Part 1. American National Standards Institute Standard ANSI S12.9-1988.
- _____. 2005. Quantities and Procedures for Description and Measurement of Environmental Sound, Part 4. Noise Assessment and Prediction of Long-term Community Response. American National Standards Institute Standard ANSI S12.9-2005.
- Committee on Hearing, Bioacoustics and Biomechanics (CHABA). 1981. Assessment of Community Noise Response to High-Energy Impulsive Sounds. Report of Working Group 84, Committee on Hearing, Bioacoustics and Biomechanics, Assembly of Behavioral and Social Sciences. National Research Council, National Academy of Sciences. Washington, DC.
- Committee of the Health Council of the Netherlands (CHCN). 1996. Effects of Noise on Health. *Noise/News International* 4. September.
- Edmonds, L.D., et al. 1979. Airport Noise and Teratogenesis. *Archives of Environmental Health*, 243-247. July/August.
- Federal Interagency Committee on Noise (FICON). 1992. Federal Agency Review of Selected Airport Noise Analysis Issues. Federal Interagency Committee on Noise. August.
- Federal Interagency Committee on Urban Noise (FICUN). 1980. Guidelines for Considering Noise in Land-Use Planning and Control. Federal Interagency Committee on Urban Noise. June.
- Fidell, S., Barger, D.S., and Schultz, T.J. 1991. Updating a Dosage-Effect Relationship for the Prevalence of Annoyance Due to General Transportation Noise. *Journal of Acoustics Society of America*, 89, 221233. January.
- Finegold, L.S., C.S. Harris, and H.E. von Gierke. 1994. Community Annoyance and Sleep Disturbance: Updated Criteria for Assessing the Impacts of General Transportation Noise on People. In *Noise Control Engineering Journal*, Volume 42, Number 1. pp. 25-30. January-February.
- Frampton, K.D., Lucas, M.J., and Cook, B. 1993. Modeling the Sonic Boom Noise Environment in Military Operating Areas. AIAA Paper 93-4432.
- Frericks, R.R., et al. 1980. Los Angeles Airport Noise and Mortality: Faulty Analysis and Public Policy. *American Journal of Public Health*, 357-362. April.
- Haber, J. and D. Nakaki. 1989. Sonic Boom Damage to Conventional Structures. HSD-TR-89April.
- Harris, C.M. (editor). 1979. *Handbook of Noise Control*. McGraw-Hill.
- Hershey, R.L. and T.H. Higgins. 1976. Statistical Model of Sonic Boom Structural Damage. FAA-RD-76-87. July.

August 2010

- Jones, F.N., and Tauscher, J. 1978. Residence Under an Airport Landing Pattern as a Factor in Teratism. *Archives of Environmental Health*, 10-12. January/February.
- Kryter, K.D. 1984. *Physiological, Psychological, and Social Effects of Noise*. NASA Reference Publication 1115, 446. July.
- Lucas, M.J. and P.T. Calamia. 1996. *Military Operations Area and Range Noise Model: NRNMAP User's Manual*. Final. Wright-Patterson AFB, Ohio: AAMRL. A1/OE-MN-1996-0001.
- Lucas, M.J. and K. Plotkin, 1988. *ROUTEMAP Model for Predicting Noise Exposure From Aircraft Operations on Military Training Routes*. Final, Wright-Patterson AFB, Ohio. AAMRL. AAMRL-TR-88-060.
- Meacham, W.C., and Shaw, N. 1979. Effects of Jet Noise on Mortality Rates. *British J. Audiology*, 77-80. August.
- Moulton, C.L. 1992. *Air Force Procedure for Predicting Noise Around Airbases: Noise Exposure Model (NOISEMAP)*. Technical Report AL-TR-1992-59.
- National Research Council/National Academy of Sciences (NRC/NAS). 1977. *Guidelines for Preparing Environmental Impact Statements on Noise*. Committee on Hearing, Bioacoustics, and Biomechanics.
- Ollerhead, J.B., *et al.* 1992. *Report of a Field Study of Aircraft Noise and Sleep Disturbance*. The Department of Transport, Department of Safety Environment and Engineering. Civil Aviation Authority, London. December.
- Page, J.A., B.D. Schantz, R. Brown, K.J. Plotkin, and C.L. Moulton. 1994. *Measurements of Sonic Booms Due to ACM Training in R2301 W of the Barry Goldwater Air Force Range*. Wyle Research Report WR 94-11.
- Pearsons, K.S., Barber, D.S., and Tabachick, B.G. 1989. *Analyses of the Predictability of Noise-Induced Sleep Disturbance*. USAF Report HSD-TR-89-029. October.
- Plotkin, K.J., 1996. *PCBoom3 Sonic Boom Prediction Model: Version 1.0c*. Wyle Research Report WR 95-22C. May.
- Plotkin, K.J. and F. Grandi, 2002. *Computer Models for Sonic Boom Analysis: PCBoom4, CABoom, BooMap, CORBoom*, Wyle Research Report WR 02-11, June 2002.
- Plotkin, K.J., C.L. Moulton, V.R. Desai, and M.J. Lucas. 1992. "Sonic Boom Environment under a Supersonic Military Operations Area," *Journal of Aircraft* 29(6): 1069-1072.
- Plotkin, K.J., L.C. Sutherland, and J.A. Molino. 1987. *Environmental Noise Assessment for Military Aircraft Training Routes, Volume II: Recommended Noise Metric*. Wyle Research Report WR 86-21. January.
- Plotkin, K.J., V.R. Desai, C.L. Moulton, M.J. Lucas, and R. Brown. 1989. "Measurements of Sonic Booms due to ACM Training at White Sands Missile Range," Wyle Research Report WR 89-18.

August 2010

- Schultz, T.J. 1978. Synthesis of Social Surveys on Noise Annoyance. *Journal of Acoustics Society of America*, 64, 377405. August.
- Stusnick, E., D.A. Bradley, J.A. Molino, and G. DeMiranda. 1992. The Effect of Onset Rate on Aircraft Noise Annoyance. Volume 2: Rented Own-Home Experiment. Wyle Laboratories Research Report WR 92-3. March.
- Stusnick, E., D.A. Bradley, M.A. Bossi, and D.G. Rickert. 1993. The Effect of Onset Rate on Aircraft Noise Annoyance. Volume 3: Hybrid Own-Home Experiment. Wyle Laboratories Research Report WR 93-22. December.
- Sutherland, L. 1990. Assessment of Potential Structural Damage from Low Altitude Subsonic Aircraft. Wyle Laboratories Research Report WR 89-16. El Segundo, CA.
- Sutherland, L.C. 1990. "Effects of Sonic Boom on Structures," Lecture 3 of Sonic Boom: Prediction and Effects, AIAA Short Course, October 1990.
- United States Department of Transportation (USDOT). 1984. Airport Noise Compatibility Planning; Development of Submission of Airport Operator's Noise Exposure Map and Noise Compatibility Program; Final Rule and Request for Comments. 14 CFR Parts 11 and 150, Federal Register 49(244): 18 December.
- United States Environmental Protection Agency (USEPA). 1972. Information on Levels of Environmental Noise Requisite to Protect the Public Health and Welfare with an Adequate Margin of Safety. U.S. Environmental Protection Agency Report 550/9-74-004. March.
- von Gierke, H.R. 1990. The Noise-Induced Hearing Loss Problem. NIH Consensus Development Conference on Noise and Hearing Loss. Washington, D.C. 22-24 January.
- Wesler, J.E. 1977. Concorde Operations At Dulles International Airport. NOISEXPO '77, Chicago, IL. March.
- White, R. 1972. Effects of Repetitive Sonic Booms on Glass Breakage. FAA Report FAA-RD-7243. April.